

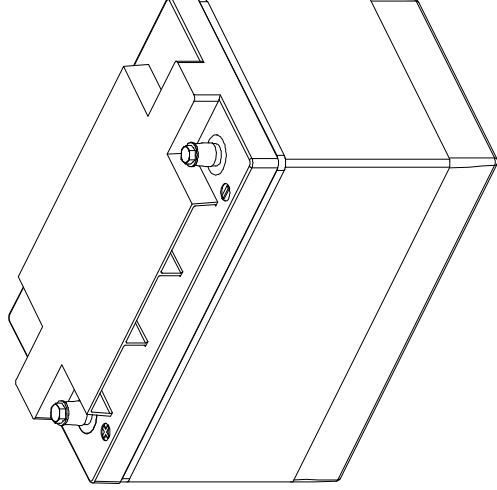


NOTES: UNLESS OTHERWISE SPECIFIED

1. SEE DRAWING NO. CB-00290 AND PROCEDURE P-1000 FOR ASSEMBLY AND TEST INSTRUCTION. PROCEDURES AND ASSEMBLY DRAWINGS ARE FOR INTERNAL USE ONLY.
2. ALL TESTING ARE IAW BATTERY COUNCIL INTERNATIONAL STANDARDS.
3. ALL DIMENSIONS ARE IN INCHES [MM].

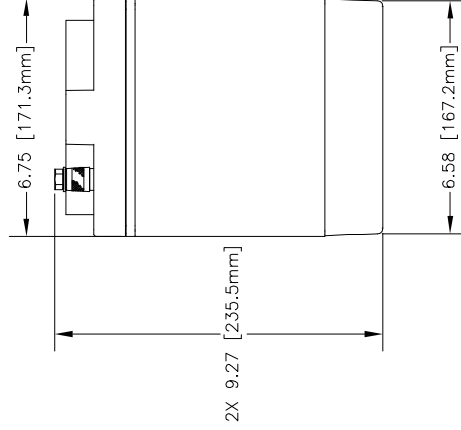

REFERENCE VIEW

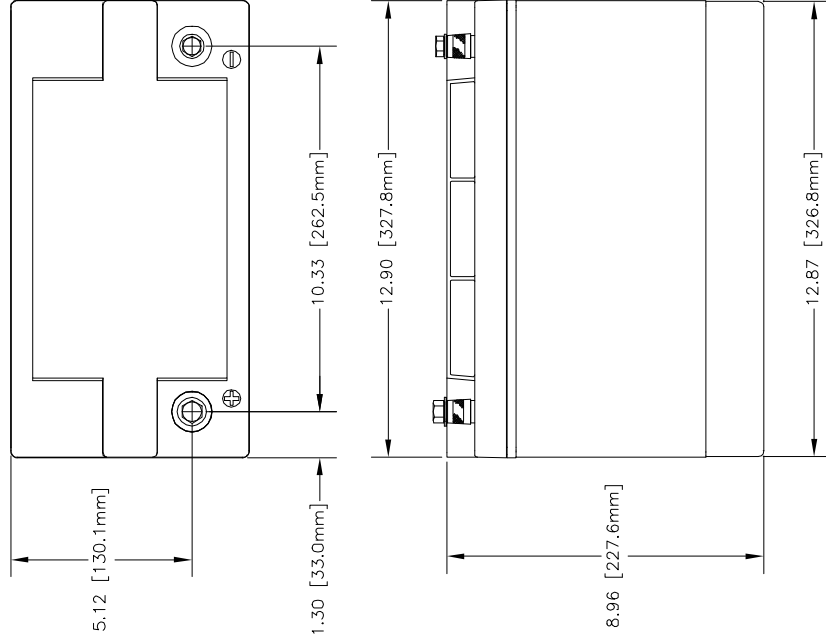

ENVELOPE DRAWING

CAPACITY RATE	
PART NUMBER	GPL-31M
NOMINAL WEIGHT	69 LBS [31.4 KG]
AMPERE HOUR CAPACITY @ 20 HOUR 1.75 VOLTS/CELL @ 77°F (25°C)	105 AH
MINUTES OF DICHARGE @ 25 AMPS 1.75 VOLTS/CELL @ 77°F (25°C)	195 MIN

QTY REQD		CAGE CODE	BAIT OR IDENTIFYING NO.	NONEXCLUSIVITY OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
PARTS LIST						
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES .XX ± .06 .XXX ± .060			CONTRACT NO.		CONCORDE BATTERY CORPORATION 2009 SAN BERNARDINO RD, W. COVINA, CA 91790	
			APPROVALS		TITLE	
			DRAWN	DATE	SIZE	CAGE CODE
TREATMENT	NONE	ELIH	3/13/00	CHECKED	S. VALDEZ	3/13/00
FINISH	NONE	APPROVED	JBT	3/16/00		
SIMILAR TO NA	ACT W/ T	ISSUED	DR	3/23/00	SCALE	NONE
				C 63017		C GPL-31M
				1		OF 1