



Application

- > Electric vehicle
- > Electric wheelchair
- > Electric scooter
- > Electric play car for children
- > Garbage truck
- > Patrol car

General Features

- > High Corrosion Resistant Performance: Pb-Ca multi-alloy grid
- > High Energy Density and Power Density
- > Excellent Charge Acceptance Ability
- > Strong High and Low Temperature Performance
- > Optimized Capability of instant High-current Discharging
- > Low self-discharge rate



Specification

Nominal Voltage	12V
Nominal Capacity	70.0Ah
Design life	5 years
Terminal	M6
Approx. Weight	Approx16.0kg (35.36lbs)
Container Material	ABS


Rated Capacity	70.0Ah	20 Hour Rate	(3.50A to 10.5V)
	62.0Ah	10 Hour Rate	(6.20 A to 10.5V)
	58.2Ah	3 Hour Rate	(19.4 A to 10.5V)
	46.0Ah	1Hour Rate	(46.0 A to 10.5V)

Operating Temperature	Discharge:	-20 ~50°C(-4~ 122°F)
	Charge:	-20 ~50°C(-4~ 122°F)
	Storage:	-20 ~50°C(-4~ 122°F)

Charge Method (25 °C)	Float Use:	13.7-13.9V@25°C
	Cycle Use :	14.7-14.9V ₀ @25°C
	Max charge current	8.75 A

Self discharge	3% of capacity declined per month at 25°C
----------------	---

Unit: mm Dimension: 223(L)×150(W) ×178(H)×178TH) Unit: mm

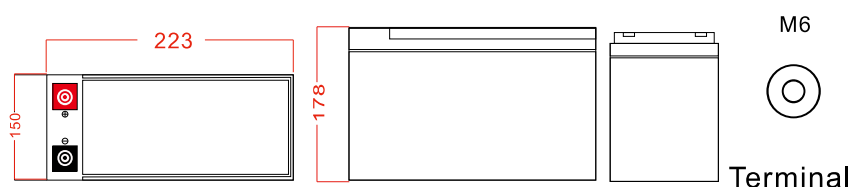

Constant Current Discharge (Amperes) at 25 °C (77°F)


F.V/Time	5Min	15Min	30Min	1h	2h	3h	5h	8h	10h	20h
1.60V	219	118	75.5	47.3	28.3	20.1	12.4	7.57	6.38	3.55
1.65V	213	114	74.0	47.0	28.2	20.0	12.3	7.50	6.32	3.54
1.70V	204	112	72.6	46.7	27.9	19.6	12.1	7.43	6.26	3.51
1.75V	188	108	72.0	46.0	27.5	19.4	12.0	7.37	6.20	3.50
1.80V	168	101	68.9	44.8	27.0	19.3	11.7	7.37	6.14	3.49
1.85V	150	90.0	62.9	41.5	25.6	18.2	11.1	7.03	5.95	3.42

Constant Power Discharge (Watt) at 25 °C (77°F)


F.V/Time	5Min	15Min	30Min	1h	2h	3h	5h	8h	10h	20h
1.60V	368	208	136	89.8	53.5	38.3	23.5	14.7	12.3	7.03
1.65V	354	204	135	89.0	53.3	37.8	23.3	14.6	12.1	7.00
1.70V	352	201	135	88.3	53.1	37.6	23.2	14.5	12.0	6.96
1.75V	328	201	134	87.5	52.8	37.4	23.0	14.5	11.9	6.93
1.80V	302	190	131	86.7	52.6	37.3	22.8	14.3	11.8	6.90
1.85V	269	170	120	80.4	50.3	35.4	21.7	13.8	11.6	6.83

Model Performance Diagrams


Discharge characteristic

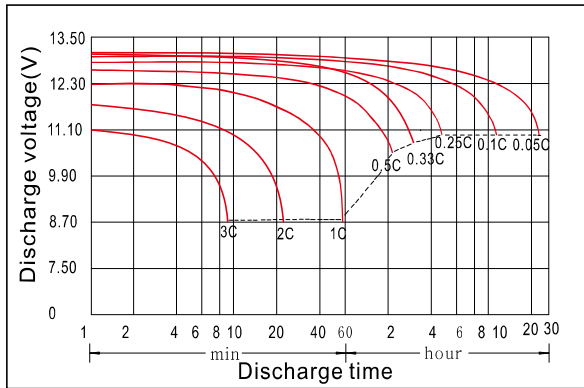


Charging characteristic

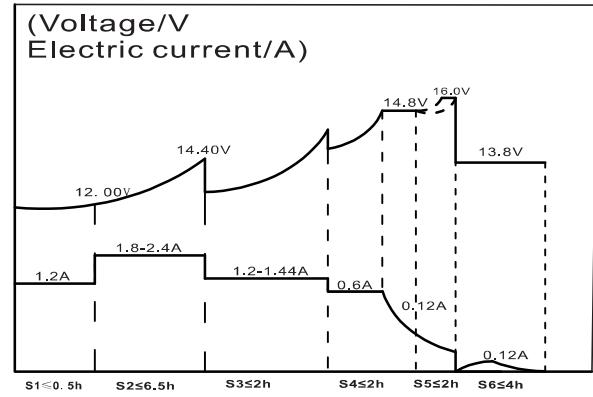


The effect of temperature on capacity

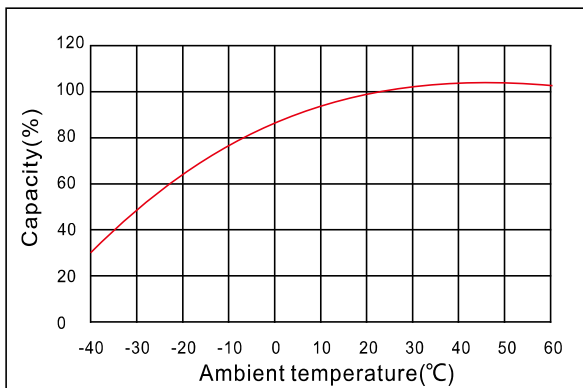

The effect of discharge depth on cycle life

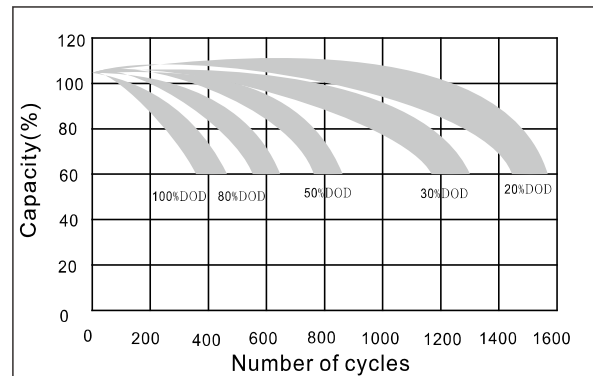

Curves of self-discharge

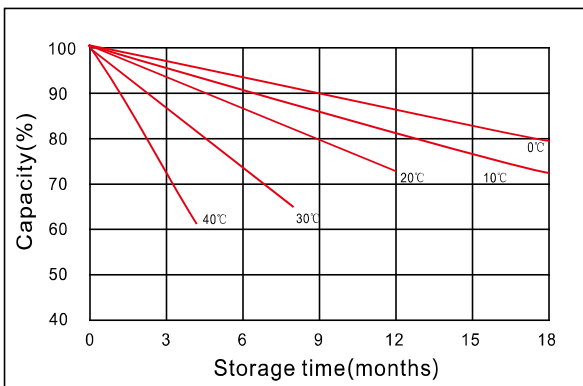

Curves of open circuit voltage vs. capacity

