



RANGE SUMMARY

EnerSys[™]

Power/Full Solutions

Publication No: US-NP-RS-003 • August 2006

Sealed Rechargeable, Valve Regulated Lead-Acid Batteries

GENERAL SPECIFICATIONS

GENESIS NPH SERIES

Type	FR Type*	Volts	Nominal Capacity (10 hr rate - Ah)	Length		Width		Overall Height Incl. Terminals		Weight		Layout	Terminals
				mm.	(in.)	mm	(in.)	mm.	(in.)	kgs.	(lbs.)		
NPH2-12	NPH2-12FR	12	2.0	68.0	2.68	51.0	2.01	88.0	3.46	0.84	1.85	2	A
NPH3.2-12	NPH3.2-12FR		3.2	134.0	5.28	67.0	2.64	64.0	2.52	1.40	3.09	3	A

GENESIS NP SERIES

Type	FR Type*	Volts	Nominal Capacity (20 hr rate - Ah)	Length		Width		Overall Height Incl. Terminals		Weight		Layout	Terminals
				mm.	(in.)	mm	(in.)	mm.	(in.)	kgs.	(lbs.)		
NP1.2-6	NP1.2-6FR	6	1.2	97.0	3.82	25.0	0.98	54.5	2.15	0.30	0.66	1	A
NP2.8-6	NP2.8-6FR		2.8	67.0	2.64	34.0	1.34	105.0	4.13	0.59	1.30	5	A/D
NP3-6	-		3.0	134.0	5.28	34.0	1.33	64.0	2.52	0.65	1.43	1	A
NP4-6	-		4.0	70.0	2.76	47.0	1.85	105.5	4.15	0.85	1.87	5	A
NP4.5-6	-		4.5	70.0	2.76	47.0	1.85	107.0	4.21	0.87	1.92	5	A
NP5-6	NP5-6FR		5.0	70.0	2.76	47.0	1.85	107.0	4.21	0.93	2.05	5	A
NP7-6	NP7-6FR		7.0	151.0	5.95	64.0	1.33	97.5	3.84	1.35	2.98	1	A/D
NP8.5-6	-		8.5	98.0	3.86	56.0	2.21	118.0	4.65	1.60	3.53	9	A
NP10-6	NP10-6FR		10.0	151.0	5.95	50.0	1.97	97.5	3.84	2.00	4.41	1	A/D
NP12-6	NP12-6FR		12.0	151.0	5.95	50.0	1.97	101.0	3.98	2.07	4.56	1	A/D
NP0.8-12	NP0.8-12FR**	12	0.8	96.0	3.78	25.0	0.98	61.5	2.42	0.35	0.77	7	I/L
NP1.2-12	-		1.2	97.0	3.82	48.0	1.89	54.5	2.15	0.57	1.25	3	A
NP2-12	-		2.0	150.0	5.91	20.0	0.79	89.0	3.50	0.70	1.54	8	B
NP2-12-C	-		2.0	182.0	7.17	23.5	0.93	61.0	2.40	0.73	1.61	6	TU
-	NP2.3-12FR		2.3	178.0	7.01	34.0	1.34	64.0	2.52	0.94	2.07	1	A
-	NP2.6-12FR		2.6	134.0	5.28	67.0	2.64	64.0	2.52	1.12	2.47	3	A
NP2.9-12	NP2.9-12FR		2.9	79.0	3.11	56.0	2.20	105.0	4.13	1.21	2.67	2	A/D
NP3-12	NP3-12FR		3.0	132.0	5.20	33.0	1.30	104.5	4.11	1.20	2.65	1	A/D
NP3.4-12	NP3.4-12FR		3.4	134.0	5.28	67.0	2.64	67.0	2.64	1.37	3.02	3	A/D
NP4-12	NP4-12FR		4.0	90.0	3.54	70.0	2.76	106.0	4.17	1.70	3.74	1	A/D
NP5-12	NP5-12FR		5.0	90.0	3.54	70.0	2.76	106.0	4.17	2.00	4.41	1	A/D
NP7-12	NP7-12FR		7.0	151.0	5.94	65.0	2.56	97.5	3.84	2.65	6.17	4	A/D
NP12-12	NP12-12FR		12.0	151.0	5.94	98.0	3.86	97.5	3.84	4.00	8.82	4	D
NP18-12B	NP18-12BFR		17.2	181.0	7.13	76.2	2.99	167.0	6.57	6.20	13.64	2	E
NP24-12	NP24-12FR		24.0	166.0	6.54	175.0	6.89	125.0	4.92	8.65	19.05	2	C
NP33-12	NP33-12FR		32.9	195.3	7.69	132.6	5.22	155.2†	6.11†	10.90	24.00	1	M
-	NP38-12B		38.0	197.0	7.74	165.0	6.50	175.0	6.89	13.80	30.40	2	J
-	NP38-12R		38.0	197.0	7.74	165.0	6.50	175.0	6.89	13.80	30.40	2	K
NP55-12	NP55-12FR		56.3	250.4	9.86	139.1	5.48	207.0†	8.15†	18.70	41.10	1	M
NP65-12	NP65-12FR		65.0	350.0	13.78	166.0	6.54	174.0	6.85	22.80	50.20	2	G
NP75-12	NP75-12FR		77.5	281.6	11.09	169.2	6.66	207.0†	8.15†	24.90	54.70	1	M
NP90-12	NP90-12FR		90.0	304.0	11.97	168.0	6.61	229.0	9.12	30.50	67.24	1	G
NP100-12	NP100-12FR		91.6	330.9	13.03	169.2	6.66	207.0†	8.15†	29.80	65.70	1	M
NP120-12	NP120-12FR		120.0	407.0	16.02	173.0	6.81	234.5	9.23	41.30	91.05	1	G
NP150-12	NP150-12FR		150.0	483.0	19.02	170.0	6.69	241.0	9.49	46.80	103.17	1	G
NP200-12	NP200-12FR		200.0	520.0	20.47	260.0	10.24	240.0	9.45	74.00	163.10	3	G

DATASAFE NPX SERIES

Type	FR Type*	Volts	W/Cell to 1.67 End Voltage (15 Min Rate)	Length		Width		Overall Height Incl. Terminals		Weight		Layout	Terminals
				mm.	(in.)	mm	(in.)	mm.	(in.)	kgs.	(lbs.)		
NPX-50	NPX-50FR	6	50W/Cell	151.0	5.95	50.0	1.97	97.5	3.84	2.00	4.41	1	A/D
NPX-25	NPX-25FR		23W/Cell	90.0	3.54	70.0	2.75	106.0	4.17	2.00	4.41	1	D
NPX-35	NPX-35FR		35W/Cell	151.0	5.94	65.0	2.56	97.5	3.84	2.67	6.24	4	A/D
NPX-80	NPX-80FR	12	80W/Cell	181.0	7.13	76.2	2.99	167.0	6.57	6.60	14.50	2	E
-	NPX-100B		95W/Cell	166.0	6.54	125.0	4.92	175.0	6.89	9.30	20.80	2	J
-	NPX-100R		95W/Cell	166.0	6.54	125.0	4.92	175.0	6.89	9.30	20.80	2	K
-	NPX-150B		150W/Cell	197.0	7.76	165.0	6.50	175.0	6.89	15.50	34.10	2	J
-	NPX-150R		150W/Cell	197.0	7.76	165.0	6.50	175.0	6.89	15.50	34.10	2	K

FOOTNOTES:


* FR: UL94-VO, Flame Retardant Case and Cover (Oxygen index: 30)

** FR: UL94-V2, Flame Retardant Case and Cover (Oxygen index: 30)

Recognized by UL File No. MH16464

† Height is to top cover. Overall height, including terminal is dependent on terminal configuration.

LAYOUT

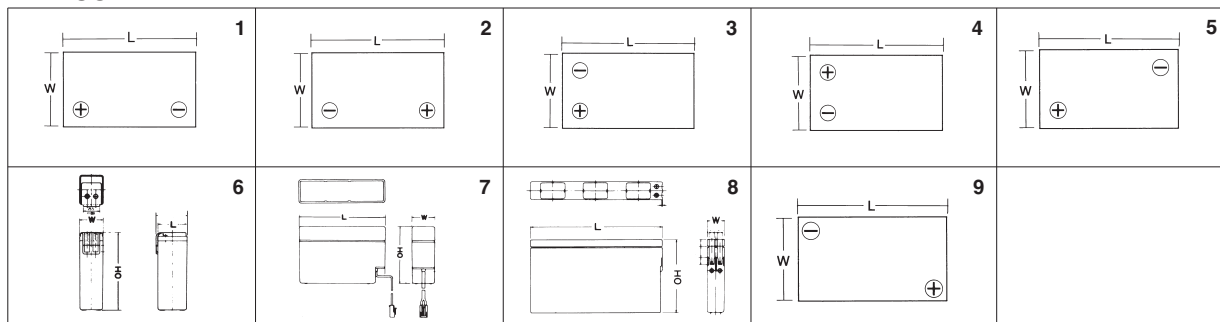

TERMINAL

185 ± .004 .059 2.50 .098 1.24 0.31 0.031	INCH = MM <table><tr><td>.250</td><td>6.35</td></tr><tr><td>.185</td><td>4.70</td></tr><tr><td>.124</td><td>3.15</td></tr><tr><td>.098</td><td>2.50</td></tr><tr><td>.059</td><td>1.50</td></tr><tr><td>.031</td><td>0.80</td></tr><tr><td>.020</td><td>0.50</td></tr><tr><td>.004</td><td>0.10</td></tr></table>	.250	6.35	.185	4.70	.124	3.15	.098	2.50	.059	1.50	.031	0.80	.020	0.50	.004	0.10	0.236 0.472 0.350 0.029 0.185 0.020	INCH = MM <table><tr><td>0.472</td><td>12.00</td></tr><tr><td>0.250</td><td>6.35</td></tr><tr><td>0.236</td><td>6.00</td></tr><tr><td>0.185</td><td>4.70</td></tr><tr><td>0.079</td><td>2.00</td></tr><tr><td>0.020</td><td>0.50</td></tr></table>	0.472	12.00	0.250	6.35	0.236	6.00	0.185	4.70	0.079	2.00	0.020	0.50	250 ± .004 .059 0.30 2.50 0.14 0.08 0.31	INCH = MM <table><tr><td>.250</td><td>6.35</td></tr><tr><td>.124</td><td>3.15</td></tr><tr><td>.098</td><td>2.50</td></tr><tr><td>.059</td><td>1.50</td></tr><tr><td>.031</td><td>0.80</td></tr><tr><td>.020</td><td>0.50</td></tr></table>	.250	6.35	.124	3.15	.098	2.50	.059	1.50	.031	0.80	.020	0.50	250 ± .004 0.20 16 310 ± .008 0.31 ± .004	INCH = MM <table><tr><td>.310</td><td>7.90</td></tr><tr><td>.250</td><td>6.35</td></tr><tr><td>.16</td><td>4.0</td></tr><tr><td>.031</td><td>0.8</td></tr><tr><td>.020</td><td>0.5</td></tr></table>	.310	7.90	.250	6.35	.16	4.0	.031	0.8	.020	0.5
.250	6.35																																																								
.185	4.70																																																								
.124	3.15																																																								
.098	2.50																																																								
.059	1.50																																																								
.031	0.80																																																								
.020	0.50																																																								
.004	0.10																																																								
0.472	12.00																																																								
0.250	6.35																																																								
0.236	6.00																																																								
0.185	4.70																																																								
0.079	2.00																																																								
0.020	0.50																																																								
.250	6.35																																																								
.124	3.15																																																								
.098	2.50																																																								
.059	1.50																																																								
.031	0.80																																																								
.020	0.50																																																								
.310	7.90																																																								
.250	6.35																																																								
.16	4.0																																																								
.031	0.8																																																								
.020	0.5																																																								
472 ± .008 216 216 453 433 216 433 0.79 ± .004	INCH = MM <table><tr><td>.472</td><td>12.00</td></tr><tr><td>.453</td><td>11.50</td></tr><tr><td>.433</td><td>11.00</td></tr><tr><td>.216</td><td>5.50</td></tr><tr><td>.079</td><td>2.00</td></tr></table>	.472	12.00	.453	11.50	.433	11.00	.216	5.50	.079	2.00	0.71 0.27 0.37 0.768 0.24	INCH = MM <table><tr><td>0.24</td><td>6</td></tr><tr><td>0.27</td><td>7</td></tr><tr><td>0.37</td><td>9.5</td></tr><tr><td>0.71</td><td>18</td></tr><tr><td>0.768</td><td>19.5</td></tr></table>	0.24	6	0.27	7	0.37	9.5	0.71	18	0.768	19.5	WIRE AWG ≤ 20 UL 1007 0.53	JST VHR-2N (TERMINAL) JST SVH-2IT-P1.1 0.16 0.31 0.23 0.42	(Lug) TERMINAL (inches) 0.327 0.197 0.602																															
.472	12.00																																																								
.453	11.50																																																								
.433	11.00																																																								
.216	5.50																																																								
.079	2.00																																																								
0.24	6																																																								
0.27	7																																																								
0.37	9.5																																																								
0.71	18																																																								
0.768	19.5																																																								
UNF#10-32		0.860 0.430 2 0.530 0.295		M Terminal height above cover <table><tr><th>Terminal Type</th><th>NP33-12 mm</th><th>ins</th><th>NP55/75/100-12 mm</th><th>ins</th></tr><tr><td>B</td><td>5.1</td><td>0.20</td><td>3.3</td><td>0.13</td></tr><tr><td>NB</td><td>22.8</td><td>0.90</td><td>21.1</td><td>0.83</td></tr><tr><td>MJ</td><td>28.4</td><td>1.12</td><td>26.9</td><td>1.06</td></tr><tr><td>AP</td><td>22.8</td><td>0.90</td><td>21.1</td><td>0.83</td></tr><tr><td>MG</td><td>38.1</td><td>1.50</td><td>36.3</td><td>1.43</td></tr><tr><td>U</td><td>22.8</td><td>0.90</td><td>21.1</td><td>0.83</td></tr></table>				Terminal Type	NP33-12 mm	ins	NP55/75/100-12 mm	ins	B	5.1	0.20	3.3	0.13	NB	22.8	0.90	21.1	0.83	MJ	28.4	1.12	26.9	1.06	AP	22.8	0.90	21.1	0.83	MG	38.1	1.50	36.3	1.43	U	22.8	0.90	21.1	0.83															
Terminal Type	NP33-12 mm	ins	NP55/75/100-12 mm	ins																																																					
B	5.1	0.20	3.3	0.13																																																					
NB	22.8	0.90	21.1	0.83																																																					
MJ	28.4	1.12	26.9	1.06																																																					
AP	22.8	0.90	21.1	0.83																																																					
MG	38.1	1.50	36.3	1.43																																																					
U	22.8	0.90	21.1	0.83																																																					
5" (12.7) 750" (19.0) .695" (17.6) .327" (8.3)	600" (15.2) 5/16" Stud .695" (17.6)	695" (17.6)	74" (18.7) 375" (9.5) .327" (8.3)	600" (15.2) 5/16" Stud 770" (19.5)																																																					
5" (12.7) 750" (19.0) .630" (16.0) .327" (8.3)	600" (15.2) 5/16" Stud .630" (16.0)	.630" (16.0)	770" (19.5) MG																																																						

Charging

- Standby use: Apply constant voltage charging at 2.275 volts per cell (or 2.25–2.30VPC).
- Cyclic use: Apply constant voltage charging at 2.40-2.50 VPC. Initial charging current should be set at less than 0.25CA.
- Top charge: Product in storage (ambient temperature 25°C/77°) requires a top charge every six months. Apply constant voltage at 2.40 volts per cell, initial charging current should be set at less than 0.1CA for 15 to 20 hours.

Discharge

- Stop operation when voltage has reached the minimum permissible voltage. Recharge immediately.
- Do not operate at 6CA or more current continuously.

Storage

- Always store battery in a fully charged condition.
- If battery is to be stored for a long period, apply a recovery top-charge every 6 months.
- Store batteries in a dry and cool location.

Temperature

- Keep within ambient temperatures of -15°C to $+50^{\circ}\text{C}$ for both charging and discharging.


Incorporating battery into equipment

- Encase battery in a well ventilated compartment.
- Avoid installing battery near heated units such as a transformer.
- House the battery in the lowest section of the equipment enclosure or rack to prevent unnecessary battery temperature rise.


Others

- Avoid terminal short circuit.
- DO NOT expose to open flame.
- Avoid setting batteries in environments which can cause direct contact to gasoline, paint thinner, organic solvents, synthetic resins, oil, etc.

RELATIONSHIP BETWEEN CHARGING VOLTAGE AND TEMPERATURE

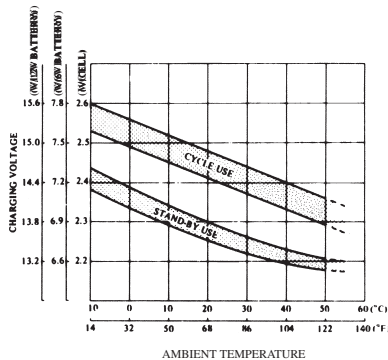


CHARGING CHARACTERISTICS

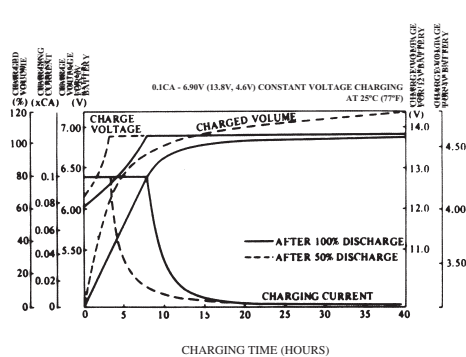


CYCLE SERVICE LIFE IN RELATION TO DEPTH OF DISCHARGE NP SERIES

TESTING CONDITIONS: DISCHARGE CURRENT: 0.17C Amp. (F.V.
1.7V/CELL
CHARGING CURRENT: 0.09C Amp.
CHARGING VOLUME: 125% OF DISCHARGED CAPACITY
AMBIENT TEMPERATURE: 20°C (68°F TO 77°F)

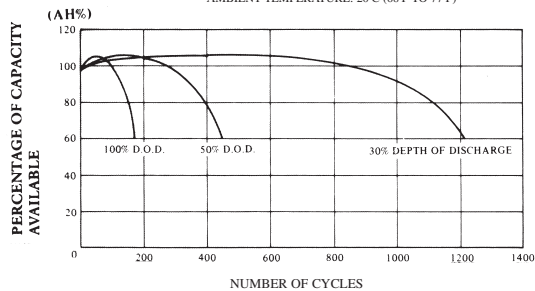


FLOAT SERVICE LIFE NP SERIES

TESTING CONDITIONS: FLOATING VOLTAGE: 2.25 TO 2.30V/CELL
AMBIENT TEMPERATURE: 20°C TO 22°C (68°F TO 72°F)

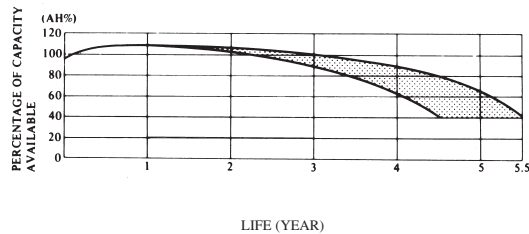

DISCHARGE CHARACTERISTICS CURVES AT 25°C (77°F) NP SERIES

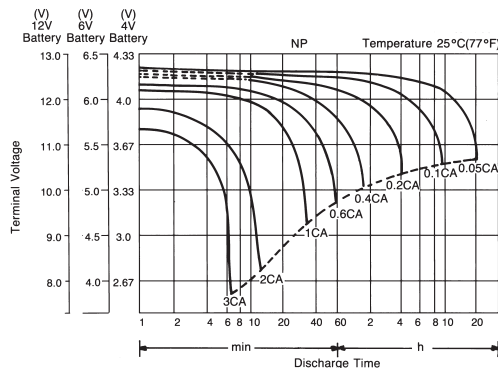

• If discharge currents in excess of 3C are required, consult an EnerSys engineer prior to use.



EnerSys
P.O. Box 14145
Reading, PA 19612-4145
USA
Tel: +1-610-208-1991
+1-800-538-3627

EnerSys EMEA
Brussels, Belgium
Tel: +32 (0)2 247 94 47
EnerSys Asia
Guangdong, China
Tel: +86 755 2689 3639

Represented by:

Printed in U.S.A.
© 2006 EnerSys. All rights reserved.
Trademarks and logos are the property
of EnerSys and its affiliates unless
otherwise noted.