

| BCI | Model | Voltage (V) | Dimension (mm) |       |        |              | Quantity(Liters) | Weight(kg) |
|-----|-------|-------------|----------------|-------|--------|--------------|------------------|------------|
|     |       |             | Length         | Width | Height | Total Height | Electrolyte      | Battery    |
| GC8 | L-890 | 8           | 262            | 181   | 245    | 278          | 5.6              | 31.2       |


Electrical Specifications

| Type  | Capacity Minutes |          | Capacity Amp-Hours(AH) |       |
|-------|------------------|----------|------------------------|-------|
|       | @25 Amps         | @56 Amps | @5Hr                   | @20Hr |
| L-890 | 340              | 132      | 155                    | 190   |



Terminal Configurations

| WNT                                                                                | Wing Nut Terminal          | EUT                                                                                 | Embedded Universal Terminal |
|------------------------------------------------------------------------------------|----------------------------|-------------------------------------------------------------------------------------|-----------------------------|
|  | Terminal Height mm(Inches) |  | Terminal Height mm(Inches)  |
|                                                                                    | 33(1.29)                   |                                                                                     | 27.4(1.08)                  |
|                                                                                    | Torque Value kgf*cm(Nm)    |                                                                                     | Torque Value kgf*cm (Nm)    |
|                                                                                    | 110~120(10.8-11.8)         |                                                                                     | 110~120(10.8-11.8)          |
|                                                                                    | Bolt 5/16"                 |                                                                                     |                             |


Battery Dimensions

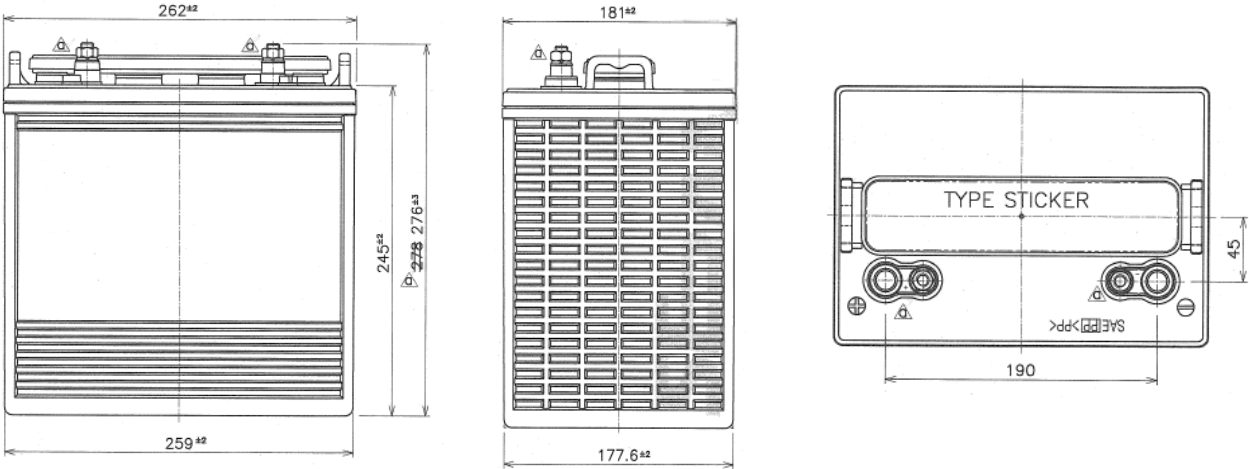

### Self Discharge Data

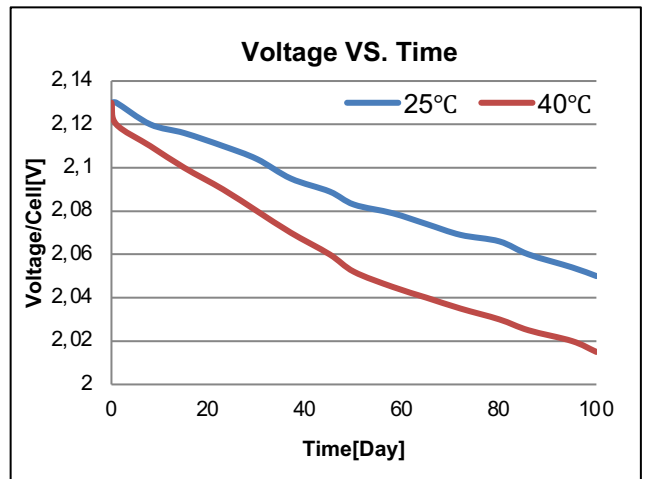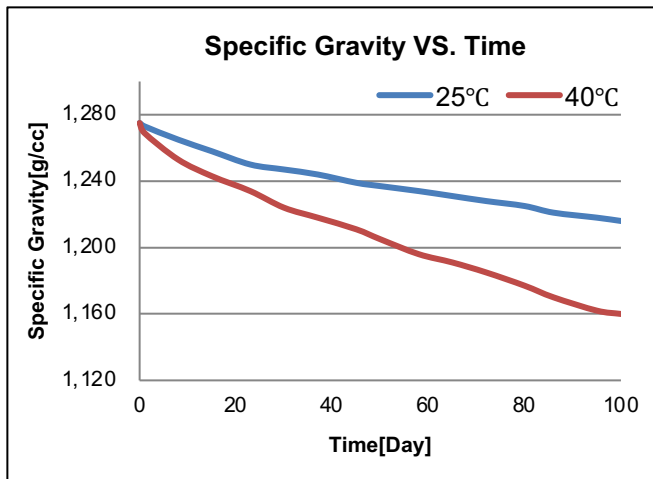

### Capacity By Discharge Current

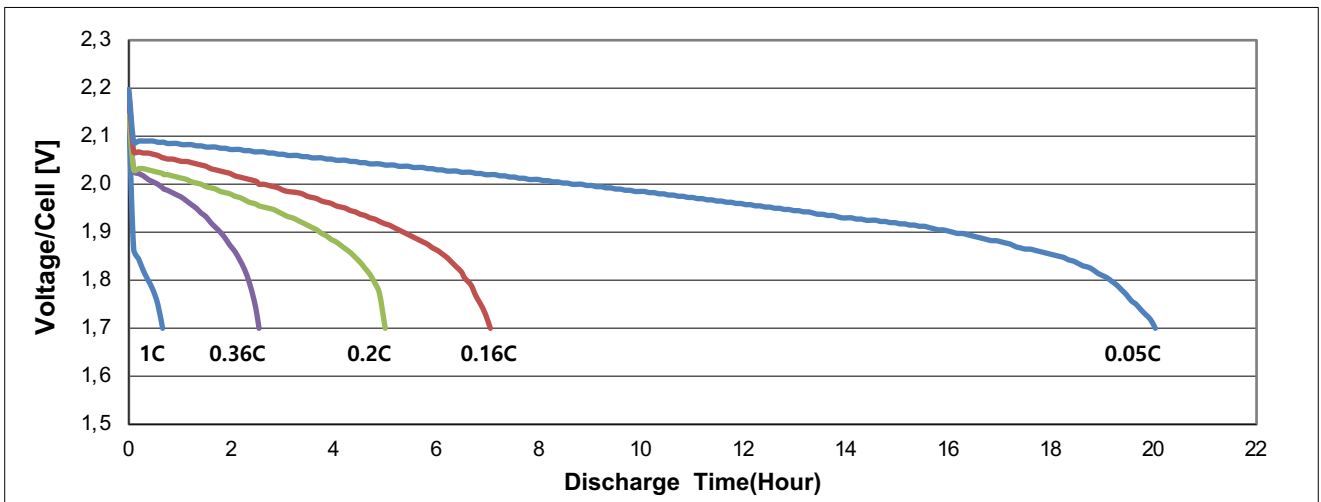

### Cycle Service Life : BCIS-06 [DOD 100% \_ 27°C]

